


UNSHIELDED DATA CABLE

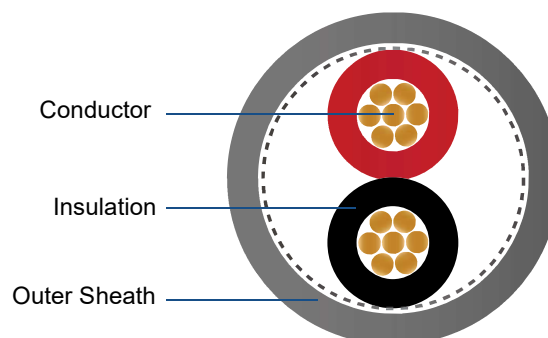

Description

- Multipair twisted cable
- Low level of line attenuations and low mutual capacitances enable long transmission distances
- Packaged on Wooden Reel
- ISO 9001 : 2015, ISO 14001 : 2015 and RoHS compliant

Application

- Internal wiring of electronic equipment, transmission measurement and control signals with minimum noise.
- Industrial, Data, Interconnect
- Public Address, BMS and Fire Alarm systems
- Optimized for Analogue Audio system
- *This product is not permitted for use in power applications.*

Technical Data

Application standard	BS EN 50288-7:2005
Temperature range	-20° C to +90° C
Operating peak Voltage (not for power application)	300/ 500 V 600/1000 V (option available on request)
Test voltage	2000 V
Minimum bending radius	Fixed 7.5 x cable Ø
Insulation resistance	> 5000 MΩxkm
Mutual capacitance	C/C: < 100 pF/m C/S: < 200 pF/m
Inductance	< 0.3 mH/km
Impedance	60 Ω

Cable Structure

- **Conductor:** Bare copper conductor, multiple wired according to IEC 60228 (Class 2/ Class 5) or ASTM (B 3/ B 33).
- **Core Insulation:** PVC (acc. to EN 50290-2-21) or PE (acc. to EN 50290-2-23) or XLPE (acc. to EN 50290-2-29) or LSZH (acc. to EN 50290-2-27). *Cores are twisted together in pairs.*
- **Outer sheath:** PVC or FR-PVC (acc. to EN 50290-2-22) or LSZH (acc. to EN 50290-2-27). Grey color.

UNSHIELDED DATA CABLE

Part Number



X - Core

02 : 02 cores
04 : 04 cores
06 : 06 cores
... : ...
50 : 50 cores

Y - Conductor Size

050 : 0.50 mm²
075 : 0.75 mm²
100 : 1.00 mm²
150 : 1.50 mm²
250 : 2.50 mm²

Z - Type Conductor

Blank : Class 2
S : Class 5
T : Tinned Copper

A - Insulation

V : PVC
E : PE
X : XLPE
Z : LSZH

B - Outer Sheath

V : PVC
F : FR-PVC
Z : LSZH

- Peak Voltage

Blank : 300/500V
H : 600/1000V

* Other conductor sizes are available upon request: 125 (1.25mm²), 200 (2.00mm²), 14A (14AWG), 16A (16AWG), 18A (18AWG), 22A (22AWG), 24A (24AWG), ... etc.

Core Identification

02 cores: Black/ Red
> 02 cores: Color or Numbered
(Available upon request)

AWG to mm²

The conductor is metrically (mm²) or American Wire Gauge (AWG) constructed.
The AWG to mm² conversion is approximate and purely informative.

AWG	mm ²
20	0.5
18	0.75
17	1.0
16	1.5

AWG	mm ²
14	2.5
12	4
10	6
8	10