


UNSHIELDED FIRE RESISTANT DATA CABLE

Mica Fire Barrier

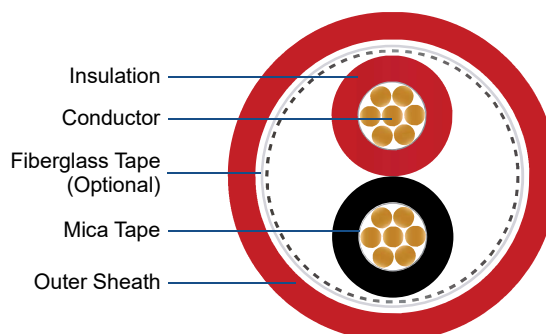

Description

- Multipair twisted cable with Mica tape
- Low level of line attenuations and low mutual capacitances enable long transmission distances
- Packaged on Wooden Reel
- ISO 9001 : 2015, ISO 14001 : 2015 and RoHS compliant

Application

- Internal wiring of electronic equipment, transmission measurement and control signals with minimum noise.
- Industrial, Data, Interconnect
- BMS, Public Address systems
- Optimized for Fire Alarm system
- *This product is not permitted for use in power applications.*

Technical Data

Application standard	BS EN 50288-7:2005
Temperature range	-20° C to +90° C
Operating peak Voltage (not for power application)	300/ 500 V 600/1000 V (option available on request)
Test voltage	2000 V
Minimum bending radius	Fixed 7.5 x cable Ø
Insulation resistance	> 5000 MΩxkm
Mutual capacitance	C/C: < 100 pF/m C/S: < 200 pF/m
Inductance	< 0.3 mH/km
Impedance	60 Ω

Cable Structure

- **Conductor:** Bare copper conductor, multiple wired according to IEC 60228 (Class 2/ Class 5) or ASTM (B 3/ B 33).
- **Fire barrier:** MICA tape.
- **Core Insulation:** XLPE (acc. to EN 50290-2-29) or LSZH (acc. to EN 50290-2-27). *Cores are twisted together in pairs.*
- **Outer sheath:** FR-PVC (acc. to EN 50290-2-22) or LSZH (acc. to EN 50290-2-27). Red color.

UNSHIELDED FIRE RESISTANT DATA CABLE

Mica Fire Barrier

Tests

- Fire resistant according to IEC 60331-21 / BS 6387 (Cat. CWZ)
- Flame retardant according to IEC 60332-1-2
- Flame test on bunched wires according to IEC 60332-3-24 (Cat. C)
- Flame test on bunched wires according to IEC 60332-3-22 (Cat. A)
- Corrosiveness of combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034-1
- Halogen-free according to IEC 60754-1
- Oil resistant according to IEC 60811-404
- Suitable for usage in explosive atmospheres acc. to IEC 60079-14 sec. 16.2.2

Part Number

LS	-	UFRS	-	X	-	Y	Z	-	A	B	-	#	-	#
				X - Core			Y - Conductor Size			A - Insulation			# - Fire Resistant	# - Peak Voltage
				02 : 02 cores			050 : 0.50 mm ²			X : XLPE			Blank : IEC 60331-21	Blank : 300/500V
				04 : 04 cores			075 : 0.75 mm ²			Z : LSZH			C : BS 6387 Cat C	H : 600/1000V
				06 : 06 cores			100 : 1.00 mm ²						W : BS 6387 Cat W	
				... : ...			150 : 1.50 mm ²						Z : BS 6387 Cat Z	
				50 : 50 cores			250 : 2.50 mm ²						15 : PH15	
													30 : PH30	
													60 : PH60	
													90 : PH90	
													120 : PH120	